



DECLARATON  
PRODUCT  
DECLARATION  
no. 10-09/2024

# PORTLAND CEMENT MULTICOMPONENT CEM II/B-M (V-LL) 32,5 R

**Declaration owner:**

Cementownia Warta S.A.

**Program owner:**

Łukasiewicz Research Network –  
Institute of Ceramic and Building  
Material  
Environmental Engineering Center

**Name of program:**


Environmental Product  
Declaration - B2B

**Date of issue:**

24.09.2024

**Declaration valid until:**

24.09.2029

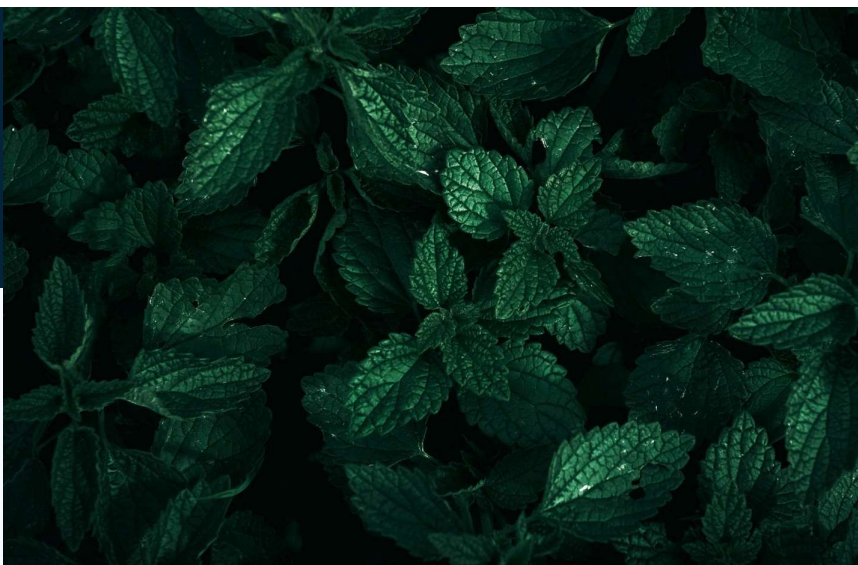

# 1.

## General information

<b>Declaration owner:</b> <b>Cementownia Warta S.A.</b>	<b>Product of declaration:</b> Portland multicomponent cement <b>CEM II/B-M (V-LL) 32,5 R.</b>
<b>Program owner:</b> Łukasiewicz Research Network- Institute of Ceramics and Building Materials Environmental Engineering Center in Opole. <a href="http://www.icimb.pl/opole/">http://www.icimb.pl/opole/</a>	<b>Declaration owner:</b> Cementownia Warta S.A. 17 Przemysłowa St, Trębaczew 98-355 Działoszyn Telefon: +48 43 84 13 003 Adres e-mail: <a href="mailto:info@wartasa.com.pl">info@wartasa.com.pl</a> <a href="https://www.wartasa.com.pl/">https://www.wartasa.com.pl/</a>
<b>Date of issue:</b> <b>24.09.2024</b>	<b>Deklarowana jednostka:</b> <b>1 t</b> (1 ton) portland multicomponent cement <b>CEM II/B-M (V-LL) 32,5 R.</b>
<b>Declaration valid until:</b> <b>24.09.2029</b>	<b>Zakres:</b> Declaration includes: portland multicomponent cement <b>CEM II/B-M (V-LL) 32,5 R</b> produced at Cementowni Warta S.A. in Trębaczewie.  The environmental declaration is based on average data provided by the manufacturer for one production plant and applies to the product manufactured by Cementownia Warta S.A., included in the declaration. The average values of the input and output streams were calculated based on data provided by the manufacturer from one production site. It contains information on the environmental impact of the declared products. All data on the production cycle were collected by Cementownia Warta S.A. in the period from 01/01/2023 to 31/12/2023 (12 months) and reflect the production technology used at that time. The life cycle assessment has been developed in accordance with the requirements of PN-EN ISO 15804+A2:2020, PN-EN ISO 14025 and PN-EN ISO 14040. The rules for product categorization have been adopted in accordance with the PN-EN 15804 standard. The declaration owner is responsible for the information and the base evidence. The Łukasiewicz Research Network - Institute of Ceramics and Building Materials Center for Environmental Engineering is not responsible for the manufacturer's information and data and evidence regarding the life cycle assessment. Claims resulting from different programs or executed contrary to the standard may not be comparable.

<p><b>Product Categorization Rules (PCR)</b></p>	<p>In accordance with the standards:  PN-EN 15804+A2:2020-03 Sustainability of construction works. Environmental Product Declarations. Basic principles of categorization of construction products.</p>
<p><b>Representatives:</b></p>	<p>Polish product, year 2023</p>
<p><b>Declared durability:</b></p>	<p>According to EN 16908, the reference service life of clinkers is not declared because it is an intermediate product to produce cement, which in turn is an intermediate product used in many fields, mainly in construction.</p>
<p><b>Reasons for performing in the LCA:</b></p>	<p>B2B</p>
<p><b>Life Cycle Analysis (LCA):</b></p>	<p>LCA analysis includes modules A1-A3 according to the standard PN-EN 15804+A2 (cradle-to-gate).</p>
<p><b>Łukasiewicz Research Network - Institute of Ceramics and Building Materials Center for Environmental Engineering provides access to Type III environmental declaration for portland multicomponent cement CEM II/B-M (V-LL) 32,5 R manufactured by Cementownia Warta S.A. to interested parties.</b></p>	
<p><b>Authors' team:</b>  Katarzyna Kiprian, M.Sc.  Ewa Głodek-Bucyk, Ph.D.  Patryk Okoń, M.Sc.</p> <p><b>Approved:</b>    Joanna Poluszyńska, PhD.  Director of the Environmental Engineering Center</p> <p>  Ewa Głodek-Bucyk, Ph.D.  Leader of the Process Engineering Research Group</p>	<p><b>Review:</b>  CEN standard PN-EN 15804+A2 serves as the main PCR document. Independent verification of declarations and data according to EN ISO 14025:2010</p> <p><input type="checkbox"/> internal <input checked="" type="checkbox"/> external</p> <p>  Katarzyna Grzesik, PhD, DSc</p>

# 2.

## Information of Manufacturer and Products

Cementownia "Warta" S.A. is a major manufacturer of cement on the Polish market. The Cementownia Warta S.A. is located in Trębaczew, Działoszyn commune, in the Pajęczno district, in the south-western part of the Łódź Voivodeship, on the right bank of the Warta River. The production plant is shown in Figure 1. The owner of the cement plant is the German company Polen Zement Beteiligungsgesellschaft GmbH from Dortmund.



Figure 1. View on Cementownia Warta S.A. and Mining Plant „Działoszyn”, A lump in the excavation of the deposit „Niwiska Górne – Grądy.

The activity of the Cementownia Warta S.A. includes processes related to limestone mining, Portland clinker production, cement production and comprehensive customer service in the field of:

- technological consulting,
- organization of transport to the customer,
- services of the Company Laboratory in the field of environmental tests and measurements, occupational health and fuel quality – accredited by PCA AB 1119.



Photo. Michał  
Braszczyński,  
Cementownia Warta S.A.

**Cementownia Warta S.A. produces the following types of cements:**

- Portland low-alkali cements,
- Portland slag cement,
- Portland fly-ash cement,
- Multicomponent Portland cements,
- Multicomponent cement,
- Special cements:
  - Portland cement PN-B-19707 - CEM I 42,5 N-NA Warta CEM I 42,5 N - NA "WARTA" low-alkali motorway cement
  - Portland cement PN-B-19707 - CEM I 42,5 N-LH/SR 5/NA Warta CEM I 42,5 N - LH/SR5/NA "WARTA" low-alkali road and bridge cement
  - Portland cement PN-B-19707 - CEM I 52,5 N-SR 3/NA Warta CEM I 52,5 N - HSR/NA "WARTA" low-alkali bridge-airport cement

The cement plant offers cements that meet the high requirements of Polish and European standards, approved for use in specialized sectors of civil, marine, mining and ecological construction. Over 70% of the cement produced is low-alkali cements.

"WARTA" low-alkali special cements are characterized by high strength parameters and very low alkali content, as well as stability of quality characteristics. Cementownia Warta S.A. is the main supplier of special cements on the domestic market.

Manufacturing products is carried out under the control of independent, national research institutes. The Department has certificates, technical recommendations and suitability assessments issued by: Łukasiewicz Research Network - Institute of Ceramics and Building Materials in Krakow, Road and Bridge Research Institute in Warsaw, Building Research Institute in Warsaw and Air Force Institute of Technology in Warsaw.

The core business of Warta Cementownia S.A. is the production of Portland clinker as an intermediate product and Portland and mixed cements. The production technology is based on two modern lines of Portland clinker production using the dry method with four-stage cyclone preheater. Fossil fuels and alternative fuels are co-combusted in the installation.

Clinker is an intermediate product used in the production of Portland cements, obtained by burning in rotary kilns a properly corrected powder, which consists mainly of calcium compounds (carbonates) and iron-bearing, clay-bearing and silicon-bearing additives. The main components of Portland clinker are calcium silicates, calcium aluminates and calcium aluminoferrates. Portland clinker is the basic raw material used for the production of common cements, i.e. hydraulic binders in the form of grey powders formed by joint grinding of the main components (Portland clinker, slag

fly ash, pozzolan, etc.) and calcium sulfate and additives (chromium Cr(VI) reducer, surfactants) for a suitably fine granulation.

The characteristics of the cement obtained depend on the properties of the clinker used and the amount and type of ingredients and additives used.

Cement, i.e. the end product of clinker milling with additives, is produced in ball mills. The basic ingredients for the production of CEM II/B-M (V-LL) 32.5 R cement are: Portland clinker, a mixture of fly ash and limestone and secondary components. The final product produced in the milling process is transported to cement silos and then directed to the packing plant – where it is bagged and palletized.

Multicomponent Portland cement CEM II/B-M (V-LL) 32.5 R meets the requirements of PN-EN 197 – 1 standards. It consists of clinker 65-79%, a mixture of fly ash and limestone 21-35% and secondary components 0-5%. It is characterized by good dynamics of strength build-up in longer hardening periods, extended setting time, high specific surface area, good workability of mortars and concrete mixtures and increased resistance to aggressive environments. CEM II/B-M (V-LL) 32.5 R cement is mainly used for standard and ready-mixed concretes of class C8/10-C30/37, concretes for foundations and foundations, construction mortars and stabilization of concrete soils and floors.


Cement production is carried out according to the scheme (Fig. 2).

Photo. Michał Braszczyński, „Działoszyn” Mining Plant, Niwiska Górne – Grądy deposit



Figure 2.

**Scheme of the cement production process produced in Cementownia Warta S.A.**

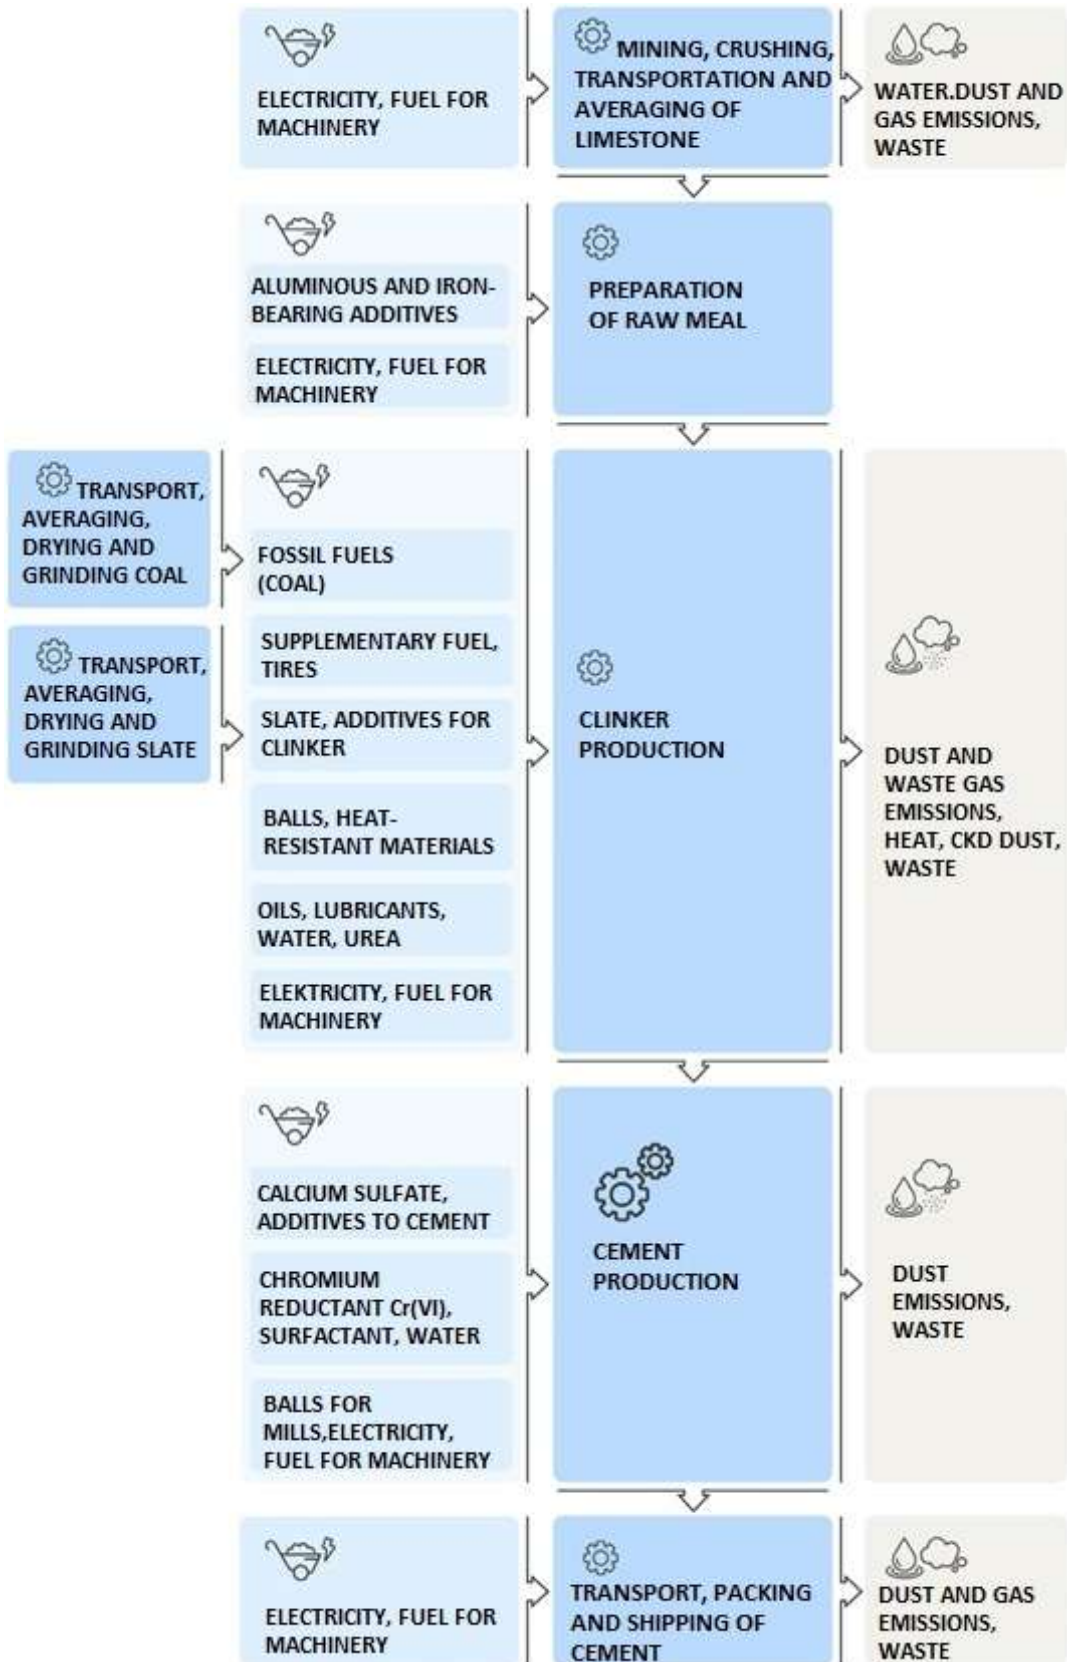

# 3.

## LCA: Calculation rules

### System limitations

The life cycle analysis of the tested products includes modules A1-A3 (Cradle to Gate) in accordance with PN-EN 15804. The selected system boundaries are in accordance with the system boundaries given in EN 16908:2017.




### A1

extraction and preparation of raw materials, generation of electricity and energy carriers for auxiliary processes



### A2

transport of raw materials to the gate of the production plant



### A3

production, including auxiliary processes and emissions

### Data collection period

Data on the production process were provided in 2024 for the period 01.01.2023 - 31.12.2023.

### Declared unit

**1 t** (1 ton) portland multicomponent cement  
**CEM II/B-M (V-LL) 32,5 R.**

## Assumptions

**A1** – extraction and consumption of raw materials refers to specific mass shares in the production process, per unit declared of the product. The values used in the calculation of module A1 have been prepared taking into account national data and data contained in the Ecoinvent v. 3.9.2 database.

**A2** – the distance from the place of obtaining raw materials to the production plant was determined individually for each raw material, the means of transport used were differentiated due to the method of delivery of raw materials.

**A3** – CO<sub>2</sub>, NO<sub>x</sub>, SO<sub>2</sub>, CO<sub>2</sub>, NH<sub>3</sub> emission values, sum of heavy metals (As, Cr, Cu, Ni, Pb, Zn), Cd+Tl, Hg, PCDD + PCDF, PCB, PAHS and dust from the production process obtained as a result of measurements carried out on the premises of the plant.

## Cut-off criteria

99% of all mass streams involved in the participation in the production process. The modelling of the set of inputs and outputs takes into account all known and available reference flows, as well as the associated master data. All energy used in the process has been taken into account in the environmental declaration.

## General data

The data for the calculations come from Ecoinvent v. 3.9.2, and from the KOBiZE report.

Emission factors for electricity were determined using actual data from the KOBiZE report. The Polish electricity emission factor (Ecoinvent supplemented with current national data from KOBiZE) is 0.685 kg CO<sub>2</sub>/kWh. A detailed analysis of data quality was part of an external audit.

The calculations were based on the information contained in the PN-EN 16908:2017-02 Cement and construction lime standard. Environmental Product Declarations. Product category rules supplementing EN 15804.

## Allocation

All data on components manufactured in Cementownia Warta S.A. were provided by the manufacturer and were referred to the declared unit of the product – **1 t** portland multicomponent cement **CEM II/B-M (V-LL) 32,5 R**. The allocation rules used in this EPD are based on the general ICIMB-PCR A principles.

# 4.

## LCA: Results

The table below shows the LCA modules considered in the calculation of the environmental impact categories for the products covered by the declaration.

DESCRIPTION OF SYSTEM BOUNDARIES (X - INCLUDED IN LCA, MND - UNDECLARED MODULE)																
Production stage			Construction stage		Usage stage							End of life stage				Benefits and flows beyond the boundaries of the system
Mining and supply of raw materials	Transport	Production	Transport	Construction process	Usufruct	Maintenance	Repair	Exchange	Renovation	Energy consumption	Water consumption	Demolition	Transport	Waste treatment	Waste management	Reuse potential
<b>A1</b>	<b>A2</b>	<b>A3</b>	<b>A4</b>	<b>A5</b>	<b>B1</b>	<b>B2</b>	<b>B3</b>	<b>B4</b>	<b>B5</b>	<b>B6</b>	<b>B7</b>	<b>C1</b>	<b>C2</b>	<b>C3</b>	<b>C4</b>	<b>D</b>
X	X	X	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND

The following tables present the results of the life cycle assessment (LCA) for 1 ton of portland multicomponent cement **CEM II/B-M (V-LL) 32,5 R**. Explanations of the abbreviations used to describe the impact category are given below:

**GWP-total** Global Warming Potential total

**GWP-fossil** Global Warming Potential: fossil fuels

**GWP-biogenic** Global Warming Potential: biogenic

**GWP-luluc** Global Warming Potential: land use and land change

<b>ODP</b>	Depletion potential of the stratospheric ozone layer
<b>AP</b>	Acidification potential, Accumulated Exceedance
<b>EP-freshwater</b>	Eutrophication potential, fraction of nutrients reaching freshwater end compartment
<b>EP-marine</b>	Eutrophication potential, fraction of nutrients reaching marine end compartment
<b>EP-terrestrial</b>	Eutrophication potential, Accumulated Exceedance
<b>POCP</b>	Formation potential of tropospheric ozone photochemical oxidants
<b>ADP-minerals&amp;metals</b>	Abiotic depletion potential for non-fossil resources
<b>ADP-fossil</b>	Abiotic depletion potential for fossil resources
<b>WDP</b>	Water (user) deprivation potential
<b>PM</b>	Potential incidence of disease due to PM emissions
<b>IRP</b>	Potential Human exposure efficiency relative to U235
<b>ETP-fw</b>	Potential comparative Toxic Unit for ecosystems
<b>HTP-c</b>	Potential comparative Toxic Unit for humans (cancerogenic)
<b>HTP-nc</b>	Potential comparative Toxic Unit for humans (non-cancerogenic)
<b>SQP</b>	Potential soil quality index
<b>PERE</b>	Use of renewable primary energy excluding renewable primary energy resources used as raw materials
<b>PERM</b>	Use of renewable primary energy resources used as raw materials
<b>PERT</b>	Total use of renewable primary energy resources
<b>PEN-RE</b>	Use of non-renewable primary energy resources excluding non-renewable primary energy resources used as raw materials
<b>RE</b>	Use of non-renewable primary energy resources used as raw materials
<b>PENRT</b>	Total use of non-renewable primary energy resources
<b>SM</b>	Use of secondary material
<b>RSF</b>	Use of renewable secondary fuels
<b>NRSF</b>	Use of non-renewable secondary fuels
<b>FW</b>	Use of net fresh water

**MAIN IMPACT INDICATORS:  
 1 ton portland multicomponent cement CEM II/B-M (V-LL) 32,5 R**

	Life cycle stage				
Indicator	Unit	A1	A2	A3	A1-A3
GWP-total	kg CO <sub>2</sub> eq.	2,69E+01	2,72E+01	5,52E+02	6,07E+02
GWP-fossil (fuel and process emission)	kg CO <sub>2</sub> eq.	2,67E+01	2,71E+01	5,52E+02	6,05E+02
GWP-fossil (fuel and process emission without biogenic fraction)	kg CO <sub>2</sub> eq.	0,00E+00	0,00E+00	5,60E+02	5,60E+02
GWP-biogenic (energy from alternative fuel)	kg CO <sub>2</sub> eq.	0,00E+00	0,00E+00	4,50E+01	4,50E+01
GWP-biogenic (primary energy)	kg CO <sub>2</sub> eq.	2,04E-01	7,78E-02	7,77E-01	1,06E+00
GWP-luluc	kg CO <sub>2</sub> eq.	1,38E-02	1,14E-02	6,91E-02	9,42E-02
ODP	kg CFC11 eq.	3,17E-07	5,15E-07	1,79E-07	1,01E-06
AP	mol H <sup>+</sup> eq.	8,12E-02	6,08E-02	7,79E-01	9,21E-01
EP-freshwater	kg PO <sub>4</sub> eq.	2,29E-02	3,52E-03	8,87E-02	1,15E-01
EP-marine	kg N eq.	1,64E-02	1,42E-02	3,34E-01	3,64E-01
EP-terrestrial	mol N eq.	1,56E-01	1,50E-01	2,30E+00	2,60E+00
POCP	kg NMVOC eq.	5,06E-02	9,07E-02	8,65E-01	1,01E+00
ADP-minerals & metals	kg Sb eq.	8,12E-05	8,56E-05	7,26E-05	2,39E-04
ADP-fossil	MJ	9,36E+02	3,80E+02	8,00E+02	2,12E+03
WDP	WDP (m <sup>3</sup> ) world ekw	1,43E+01	1,68E+00	-1,77E+02	-1,61E+02

**ADDITIONAL IMPACT INDICATORS:  
 1 ton portland multicomponent cement CEM II/B-M (V-LL) 32,5 R**

	Life cycle stage				
Indicator	Unit	A1	A2	A3	A1-A3
PM	Disease incidence	4,37E-07	1,71E-06	5,92E-06	8,07E-06
IRP	kBq U235 eq.	5,91E-01	8,93E-01	8,32E-01	2,32E+00
ETP-fw	CTUe	2,29E-02	3,52E-03	8,87E-02	1,15E-01
HTP-c	CTUh	9,57E-08	1,78E-07	1,94E-07	4,67E-07
HTP-nc	CTUh	2,13E-07	2,31E-07	8,84E-07	1,33E-06
SQP	-	9,88E+01	2,05E+02	4,34E+02	7,37E+02

**INDICATORS DESCRIBING RESOURCE CONSUMPTION:  
 1 ton Portland multicomponent cement CEM II/B-M (V-LL) 32,5 R**

	Life cycle stage				
Indicator	Unit	A1	A2	A3	A1-A3
PERE	MJ	2,23E+01	1,09E+01	1,25E+02	1,58E+02
PERM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	2,23E+01	1,09E+01	1,25E+02	1,58E+02
PEN-RE	MJ	1,24E+03	3,91E+02	1,02E+03	2,65E+03
RE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	1,24E+03	3,91E+02	1,02E+03	2,65E+03
SM	kg	0,00E+00	0,00E+00	3,63E-01	3,63E-01
RSF	MJ	0,00E+00	0,00E+00	6,95E+02	6,95E+02
NRSF	MJ	0,00E+00	0,00E+00	9,00E+02	9,00E+02
FW	m <sup>3</sup>	3,12E-01	1,76E-01	1,56E+00	2,05E+00

**INDICATORS DESCRIBING OUTPUT STREAMS AND WASTE:  
 1 ton Portland multicomponent cement CEM II/B-M (V-LL) 32,5 R**

	Life cycle stage				
Indicator	Unit (referred to the DU)	A1	A2	A3	A1-A3
Amount of hazardous waste	kg	WN	WN	4,67E-02	4,67E-02
Amount of non-hazardous waste	kg	WN	WN	5,30E+00	5,30E+00
Amount of radioactive waste	kg	WN	WN	0,00E+00	0,00E+00
Reusable components	kg	WN	WN	0,00E+00	0,00E+00
Recycling materials	kg	WN	WN	5,30E+00	5,30E+00
Energy recovery materials	kg	WN	WN	4,51E-02	4,51E-02
Wyeksportowana energia	MJ/energy carrier	WN	WN	0,00E+00	0,00E+00

**BIOGENIC CARBON**


**Biogenic carbon content of the product (kg C<sub>org</sub>)** **0,00E+00**

**Biogenic carbon content in the package (kg C<sub>org</sub>)** **1,84E-12**

Note: 1 kg of biogenic carbon corresponds to emissions of approximately 3,67 kg CO<sub>2</sub>.

# 5. Interpretation of results

Figure 3 shows a graph of the contributions of individual life cycle modules to the basic categories of impact portland multicomponent cement **CEM II/B-M (V-LL) 32,5 R**.

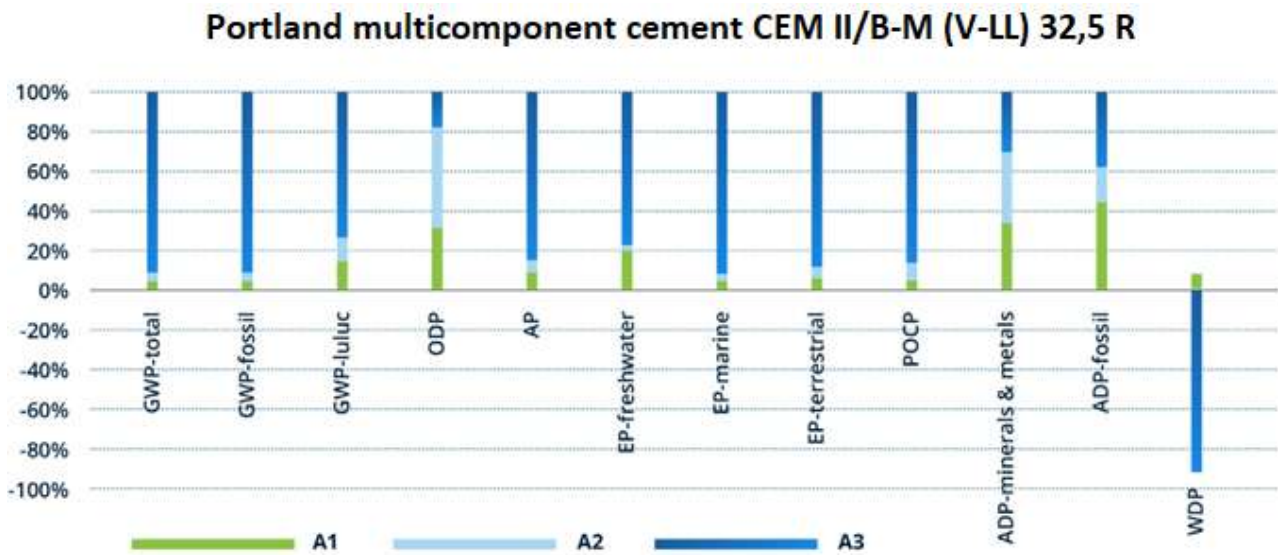

**Figure 3.** Shares of life cycle modules on the main categories of influence – portland multicomponent cement **CEM II/B-M (V-LL) 32,5 R**.

# Literature



Photo. Michał Braszczyński, Cementownia Warta S.A.

- PN-EN ISO 14025:2014-04, Environmental labels and declarations -- Type III environmental declarations -- Rules and procedures.
- PN-EN 15804+A2:2020, Sustainability of building structures -- Environmental product declarations -Basic principles of categorization of construction products.
- PN-EN ISO 14040:2009 Environmental management. Life Cycle Assessment. Principles and structure.
- PN-EN ISO 14044:2009, Environmental management. Life Cycle Assessment. Requirements and guidelines.
- EN 15942:2012, Sustainability of construction works – Environmental product declarations – Communication format business-to-business.
- The Act of 14 December 2012 on Waste, Journal of Laws. 2013, item 21.
- Act of 27 April 2001. Environmental Protection Law Journal of Laws 2024.54, consolidated text.
- EN 197-1:2011: Cement – Part 1: Composition, specifications and conformity criteria for commonly used cements.
- KOBiZE CO<sub>2</sub>, SO<sub>2</sub>, NO<sub>x</sub>, CO and total particulate matter emission factors for electricity, 2022.
- PN-EN 16908:2017-02 Cement and construction lime. Environmental Product Declarations. Product category rules supplementing EN 158044.

Explanatory material can be obtained by contacting the representative directly Cementownia Warta S.A.



**Łukasiewicz**  
Institute  
of Ceramics  
and Building  
Materials

Łukasiewicz Research Network - Institute of Ceramics and Building Materials  
31-983 Kraków, Cementowa 8 Str., Poland

CENTER OF ENVIRONMENTAL ENGINEERING

45-641 Opole, Oświęcimska 21 Str., Poland  
Phone: +48 77 456 32 01

www.icimb.lukasiewicz.gov.pl  
info.opole@icimb.lukasiewicz.gov.pl

**PROCESS ENGINEERING RESEARCH GROUP**

## TYPE III ENVIRONMENTAL DECLARATION CERTIFICATE

no. 10-09/2024

**Products:**

**Portland multicomponent cement**

**CEM II/B-M (V-LL) 32,5 R**

**Owner:**

**Cementownia Warta S.A.**

**17 Przemysłowa st., Trębaczew**

**98-355 Działoszyn**

The declaration was developed in accordance with the requirements of the standard:

**PN-EN 15804+A2: 2020-03**

Sustainability of construction works  
Environmental product declarations  
Core rules for the product category of construction products

The declaration was verified in accordance with the requirements of the standard:


**PN-EN ISO 14025:2010**

Environmental labels and declarations  
Type III environmental declarations. Principles and procedures

The certificate was issued for the first time on **September 24, 2024** and is valid for 5 years or until the said EPD is amended.

**Process Engineering  
Research Group Leader**

Ewa Głodek-Bucyk, PhD Eng.

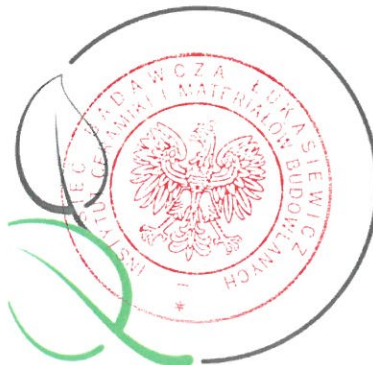

**Director of  
Environmental  
Engineering Center**

Joanna Poluszyńska, PhD

**Opole, September 2024**